FRANKLINWH

aPower

AC-coupled battery

Store solar generated power while the sun is shining. Use the stored energy when needed to lower electric bills. Run heavy loads such as air conditioners and water heaters as usual even during grid outages. Provide homeowner peace of mind by fully charging before severe weather events.



- ✓ Safe LFP chemistry
- ✓ Built-in inverter
- ✓ 13.6 kWh per unit, up to 204 kWh (15 units) per aGate
- ✓ 5 kW continuous / 10 kW peak for 10s (discharge)

- ✓ Normal operations down to -4°F (-20°C)
- ✓ IP67 protection
- ✓ Single aPower capable of starting a 4-Ton AC
- ✓ First-of-its-kind 208 V compliant battery for multi-family housing

PERFORMANCE SPECIFICATIONS

| Model Number | aPower X |
|------------------------|--|
| Battery Chemistry | Lithium Iron Phosphate (LFP) |
| Usable System Energy | 13.6 kWh per unit, up to 15 units¹ per aGate |
| Aggregate Throughput | 43 MWh |
| Real Power (charge) | 5 kW continuous, 7.6 kW peak for 30 minutes |
| Real Power (discharge) | 5 kW continuous, 10 kW peak for 10 seconds |
| Load Start Capability | 118 A LRA ² |
| Nominal AC Voltage | 120 / 208 V, 120 / 240 V, 60 Hz |
| Coupling | AC-coupled |
| Phase | 2 W+N+PE |
| Round Trip Efficiency | 89% ³ |
| Work Modes | Self-Consumption, Time of Use, Emergency Backup |
| Noise Emission | <30 dB (A) ⁴ |
| User Interface | FranklinWH App |
| Warranty | 12 years |

MECHANICAL SPECIFICATIONS

| Dimensions (H | \times W \times D) | 45.3 in × 29.5 in × 11.4 in (1150 mm × 750 mm × 290 mm) |
|---------------|------------------------|--|
| Weight | | 395 lb (179 kg) |
| Mounting | | Wall mount or floor mount |
| Cooling | | Natural air-cooled design |
| | 29.5 in (750 mm) | 11.4 in (290 mm) |

COMPLIANCE INFORMATION

| Certifications | UL 9540, UL 9540A, UL 1741, UL 1973, IEEE 1547, IEEE 1547.1, UN 38.3,CAN/CSA C22.2 No. 107.1-16 |
|----------------|--|
| Seismic | AC 156, OSHPD, IEEE 693-2005 (high) |
| Environmental | California Proposition 65 RoHS Directive 2011 / EU |
| Emissions | FCC Part 15 Class B, ICES 003 |

ENVIRONMENTAL SPECIFICATIONS

| Ingress Protection | IP67 (Battery and power converter system), IP56 (Wiring compartment) |
|-------------------------|---|
| Operating Temperature | -4°F to 122°F (-20°C to 50°C) |
| Operating Humidity (RH) | Up to 100% RH, condensing |
| Altitude | Maximum 9,843 ft (3,000 m) |
| Environment | Indoor and outdoor rated |

^{1.} For 120 / 208V applications, max. 4 aPowers per aGate can be connected in parallel. Please contact us if you have large capacity requirements.


^{2.} Load start capability may vary.

^{3.} At beginning of life, AC to battery to AC, 50% power rating.


^{4.5} kW discharge power, no fan running.

Franklin Home Power Solution

Whole Home Backup

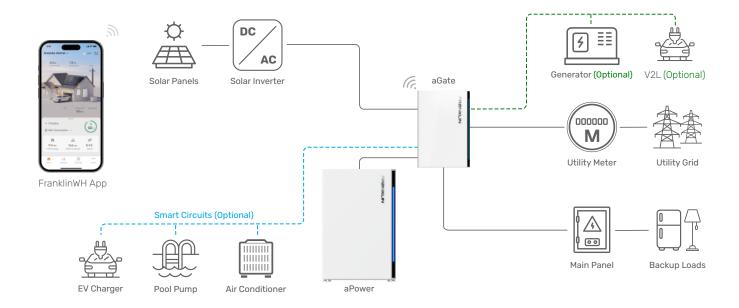

Partial Home Backup

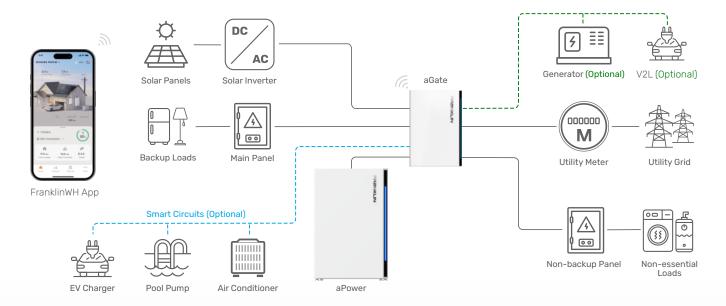

The aPower 1.3 (SKU: APR-05K13V1-US) is available in United States and Canada. For product availability in other regions, please visit our official website or contact a local authorized dealer.

Address: 1731 Technology Dr., Suite 530 San Jose, CA 95110 Telephone: +1 888-837-2655 Email: info@franklinwh.com Website: www.franklinwh.com Copyright 2025 FranklinWH Energy Storage Inc. All rights reserved. The Franklin logo, FranklinWH, and other trademarks or service names are the trademarks of FranklinWH Energy Storage Inc. The document is for informational purposes only, data subject to change. 2025-10-11



