

# aPower

## AC-coupled battery

Store solar generated power while the sun is shining. Use the stored energy when needed to lower electric bills. Run heavy loads such as air conditioners and water heaters as usual even during grid outages. Provide homeowner peace of mind by fully charging before severe weather events.



- ✓ Safe LFP chemistry
- ✓ Built-in inverter
- ✓ 13.6 kWh per unit, up to 204 kWh (15 units) per aGate
- ✓ 5 kW continuous / 10 kW peak for 10s (discharge)

### PERFORMANCE SPECIFICATIONS

Model Number	aPower X
Battery Chemistry	Lithium Iron Phosphate (LFP)
Usable System Energy	13.6 kWh per unit, up to 15 units <sup>1</sup> per aGate
Aggregate Throughput	43 MWh
Real Power (charge)	5 kW continuous, 7.6 kW peak for 30 minutes
Real Power (discharge)	5 kW continuous, 10 kW peak for 10 seconds
Load Start Capability	118 A LRA <sup>2</sup>
Nominal AC Voltage	120 / 208 V, 120 / 240 V, 60 Hz
Coupling	AC-coupled
Phase	2 W+N+PE
Round Trip Efficiency	89% <sup>3</sup>
Work Modes	Self-Consumption, Time of Use, Emergency Backup
Noise Emission	<30 dB (A) <sup>4</sup>
User Interface	FranklinWH App
Warranty	12 years

### COMPLIANCE INFORMATION


Certifications	UL 9540, UL 9540A, UL 1741, UL 1773, IEEE 1547, IEEE 1547.1, UN 38.3, CAN/CSA C22.2 No. 107.1-16
Seismic	AC 156, OSHPD, IEEE 693-2005 (high)
Environmental	California Proposition 65 RoHS Directive 2011 / EU
Emissions	FCC Part 15 Class B, ICES 003

1. For 120 / 208V applications, max. 4 aPowers per aGate can be connected in parallel. Please contact us if you have large capacity requirements.  
2. Load start capability may vary.

- ✓ Normal operations down to -4°F (-20°C)
- ✓ IP67 protection
- ✓ Single aPower capable of starting a 4-Ton AC
- ✓ First-of-its-kind 208 V compliant battery for multi-family housing

### MECHANICAL SPECIFICATIONS

Dimensions (H x W x D)	45.3 in x 29.5 in x 11.4 in (1150 mm x 750 mm x 290 mm)
Weight	395 lb (179 kg)
Mounting	Wall mount or floor mount
Cooling	Natural air-cooled design

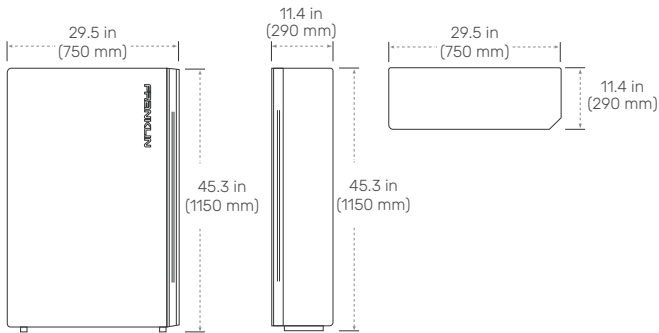


### ENVIRONMENTAL SPECIFICATIONS

Ingress Protection	IP67 (Battery and power converter system), IP56 (Wiring compartment)
Operating Temperature	-4°F to 122°F (-20°C to 50°C)
Operating Humidity (RH)	Up to 100% RH, condensing
Altitude	Maximum 9,843 ft (3,000 m)
Environment	Indoor and outdoor rated


3. At beginning of life, AC to battery to AC, 50% power rating.  
4. 5 kW discharge power, no fan running.

# Franklin Home Power Solution

## Whole Home Backup

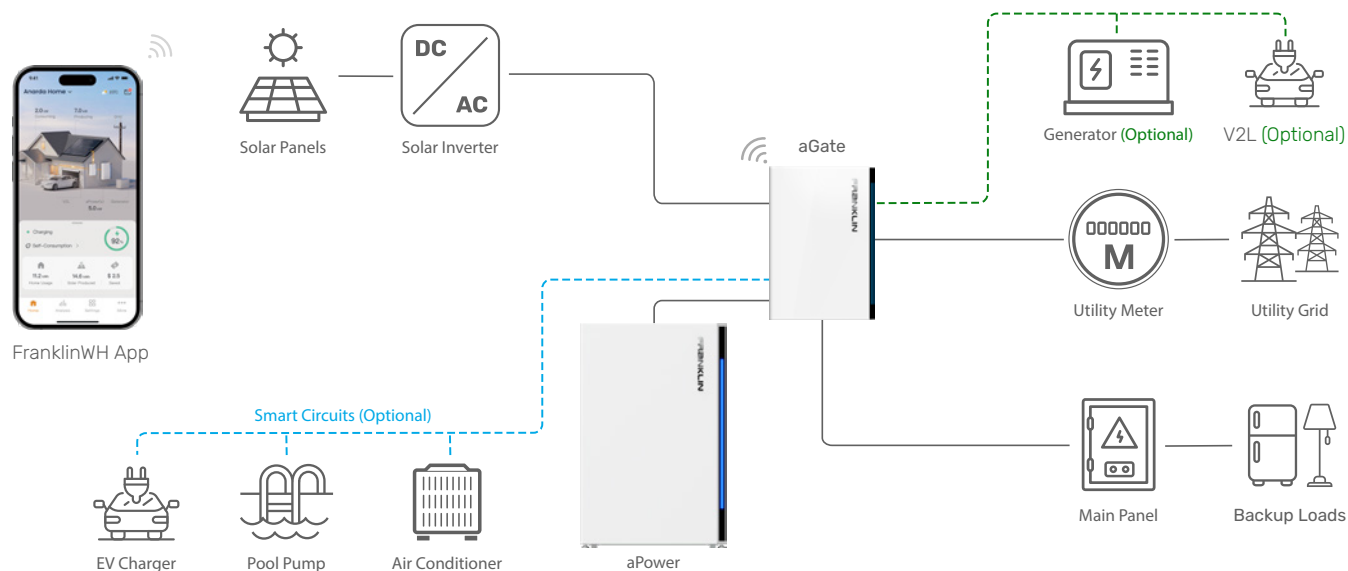

## Partial Home Backup

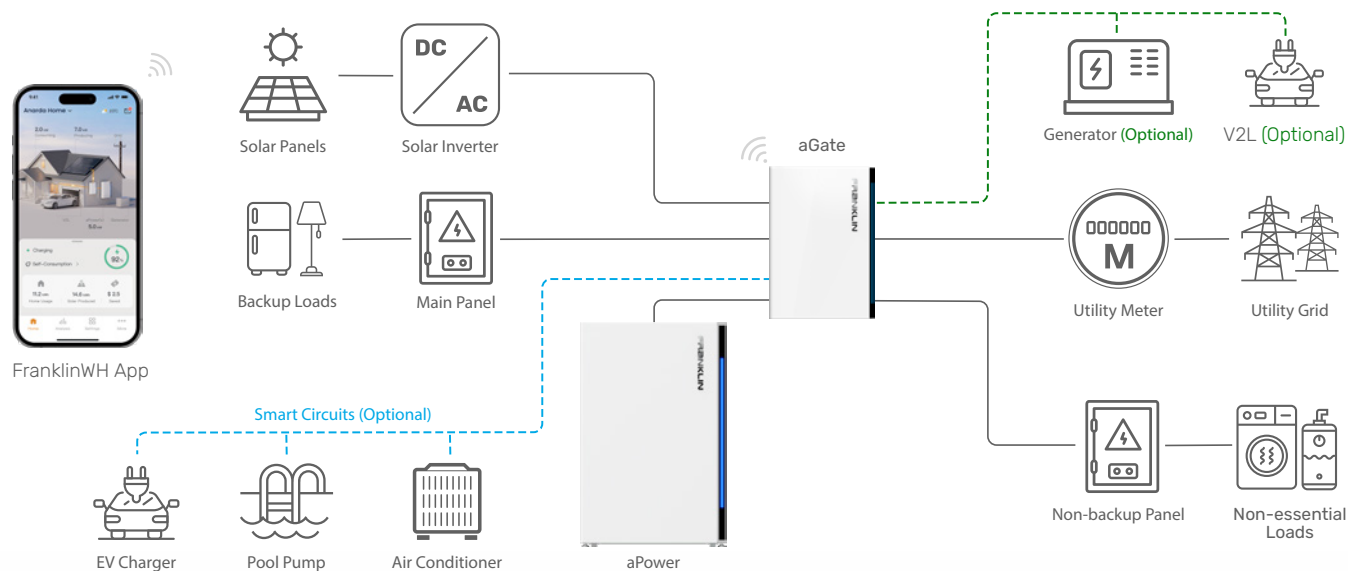

The aPower 1.3 (SKU: APR-05K13V1-US) is available in United States and Canada.  
For product availability in other regions, please visit our official website or contact a local authorized dealer.

**Address:** 1731 Technology Dr., Suite 530 San Jose, CA 95110 **Telephone:** +1 888-837-2655 **Email:** info@franklinwh.com **Website:** www.franklinwh.com

Copyright 2025 FranklinWH Energy Storage Inc. All rights reserved. The Franklin logo, FranklinWH, and other trademarks or service names are the trademarks of FranklinWH Energy Storage Inc.  
The document is for informational purposes only, data subject to change. 2025-07-09

