

aPower S

Complete solar and battery system

The aPower S is a battery storage device with integrated inverters to support a direct connection to solar (PV) panels. The front wiring design makes installation easier and more efficient.

The aPower S also supports parallel AC-coupled connection with FranklinWH aPower 2 batteries to expand power and capacity for homes at the same time. It can be flexibly deployed according to customer requirements. Excellent load adaptability provides the best backup experience to users.

aPower S has a 15 kWh capacity, which can provide whole home backup with a single battery. It provides a 60 MWh throughput or 15-year warranty, helping users to easily achieve reliable energy independence and freedom over the long term.



- ✓ Four built-in MPPTs
- ✓ 15 A per MPPT
- ✓ RTE 90.5%
- ✓ Safer LFP battery cell chemistry
- ✓ Built-in hybrid inverter
- ✓ 15 kWh per unit, up to 225 kWh (15 units) per aGate
- ✓ Max 11.5 kW continuous / 15 kW peak for 10 seconds
- ✓ Built-in heating blanket ensures reliable cold-weather performance
- ✓ Stable operations in extreme 131° F (55° C)
- ✓ IP67 weather protection

PERFORMANCE SPECIFICATIONS

Name	aPower S	Round Trip Efficiency (Solar – Battery – Load)	90.5% ¹
SKU	APRS-10K15V1-US	Solar to Home / Grid - CEC Efficiency	97.5% ⁴
Nameplate Model	aPower S-10	Maximum Short-Circuit Current Rating	10 kA
Certification / CEC Listing Name	aPower Syyy		Self-Consumption
Battery Chemistry	Lithium Iron Phosphate (LFP)	Work Modes	Time of Use
Usable System Energy	15 kWh ¹ per unit, up to 15 units per aGate		Emergency Backup
Aggregate Warrantied Throughput	60 MWh	Noise Emission	30 dBA Typical
Max Real Power (Charge)	8 kW continuous ²		45 dBA Maximum
Max Real Power (Discharge)	11.5 kW ³ / 11.5 kVA continuous ²	Flood Resistance (IP67)	Up to 29" from the aPower S base
Nominal AC Voltage	120 / 240 V, 120 / 208 V, 60 Hz	AC Metering	Revenue Grade (+/- 0.5%, ANSI C12.20)
Coupling	Hybrid-Coupled	User Interface	FranklinWH App
Phase	2 W+N+PE	Warranty ⁵	15 years or 60 MWh throughput

Solar Technical Specifications

Maximum Solar STC Input	20 kW	MPPTs	4
Withstand Voltage	600 Vdc	Maximum Current per MPPT (Imp)	15 A ⁶
PV DC Input Voltage Range	60 – 550 Vdc	Maximum Short Circuit Current per MPPT (Isc)	20 A
PV DC MPPT Voltage Range	90 – 480 Vdc		

PERFORMANCE SPECIFICATIONS

Power Rated

Nominal Output Power (AC)	5 kW	7.6 kW	9.6 kW	10 kW	11.5 kW ⁵
Maximum Apparent Power	5 kVA	7.6 kVA	9.6 kVA	11.5 kVA	11.5 kVA
Maximum Continuous Current	21 A	32 A	40 A	48 A	48 A
Overcurrent Protection Device	30 A	40 A	50 A	60 A	60 A
Maximum Continuous Input Power	5 kW	7.6 kW	8 kW	8 kW	8 kW
Power Factor	±1	±1	±1	±0.87	±1

COMPLIANCE INFORMATION

Certifications	UL9540; UL9540A; UL1737; UL1741; UL1741 SB; UL1741 PCS; UL 1741 Multimode; UL 1741 CRD; UL 3141; UL1699B; UL1998; UN38.3; IEEE 1547; IEEE 1547.1; CSA 22.2 No.107.1;
Seismic	AC 156, OSHPD, IEEE 693-2005 (high)
Environmental	California Proposition 65
Emissions	FCC Part 15 Class B, ICES 003

MECHANICAL SPECIFICATIONS

Dimensions (H x W x D)	45.2 in x 29.5 in x 11.8 in (1149 mm x 750 mm x 300 mm)
Weight, aPower S complete	388 lbs (176 kg)
Weight, without Cover	365 lbs (166 kg)
Mounting	Wall or floor mount
Cooling	Natural

1.

At beginning of life: 3 kW charge/discharge power, 77° F (25° C).
2.

At rated power of 11.5 kVA.
3.

When both PV and battery are supplying power, the system can deliver a continuous AC output of up to 11.5 kW. When powered by battery only, the continuous AC output is 10 kW. This is only applicable to aPower S units with 11.5 kW indicated on the product nameplate. Otherwise, the output power shall be based on the product nameplate.
4.

Tested in accordance with the CEC-weighted efficiency approach.
5.

For more details, please refer to the FranklinWH System Limited Warranty for End Users available in the Documentation Center on the FranklinWH website.
6.

If the selected PV module has an IMPP exceeding 15 A, the MPPT will automatically limit the current to 15 A. The total open-circuit voltage must not exceed the maximum input voltage of 550 V.
7.


The output performance is designed with reference to IEC 62040-3 (Uninterruptible Power Systems - Part 3; Method of specifying the performance and test requirements. A number of core indicators meet the requirements of high-performance UPS.
- For aPower connection, use ONLY copper conductors, rated to a minimum of 194° F (90° C).

Off-Grid Specifications⁷

THDU	<1%
Voltage Regulation Accuracy	±1%
Frequency Accuracy	±0.1 Hz
Max Half-Wave Load Capability	5 kW ²
Max Peak Output Power	15 kW @ 10 S ²
Max Transient load capacity	25 kW @ 1 S ²
Load Imbalance Ratio	100%
Load Start Capability	185 A LRA ²

ENVIRONMENTAL SPECIFICATIONS

Enclosure Type	Type 3R
Ingress Protection	IP55 (Wiring) IP67 (Battery Pack & Inverter)
Operating Temperature	-4 °F to 122 °F (-20 °C to 50 °C) Operates up to 131 °F (55 °C) derated output
Operating Humidity (RH)	Up to 100% RH, condensing
Altitude	Maximum 9,843 ft (3,000 m)
Environment	Indoor / Outdoor

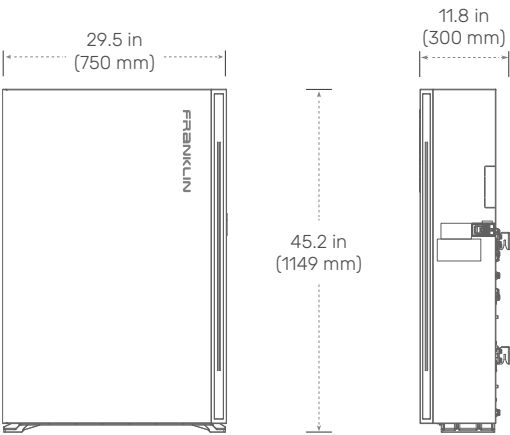

Note:
At launch, the aPower S will only be compatible with external RSD transmitter products. It is certified and listed as a Photovoltaic Rapid Shutdown System (PVRSS) when installed with approved equipment. For a list of compatible devices and installation requirements, please refer to the Documentation Center or contact engineering@franklinwh.com.

The aPower S (SKU: APRS-10K15V1-US) is available in the United States and Canada. For product availability in other regions, please visit our official website or contact a local authorized dealer.

